




Telecasters are traditionally wired with the 2 pickups in parallel as is the Stratocaster so even when you have 2 pickups selected together both are in parallel. With this mod in position 4 the two pickups are in series meaning that when they are both on together they give more output and so a fatter tone. With position 1 being closest to the volume control the pickup combinations are:-


- Position 1: Bridge Pickup (standard Tele)
- Position 2: Bridge and Neck pickups together in Parallel (standard Tele)
- Position 3: Neck Pickup (standard Tele)
- Position 4: Bridge & Neck Pickups in Series (fatter tone than #2 and more output than 1-3)

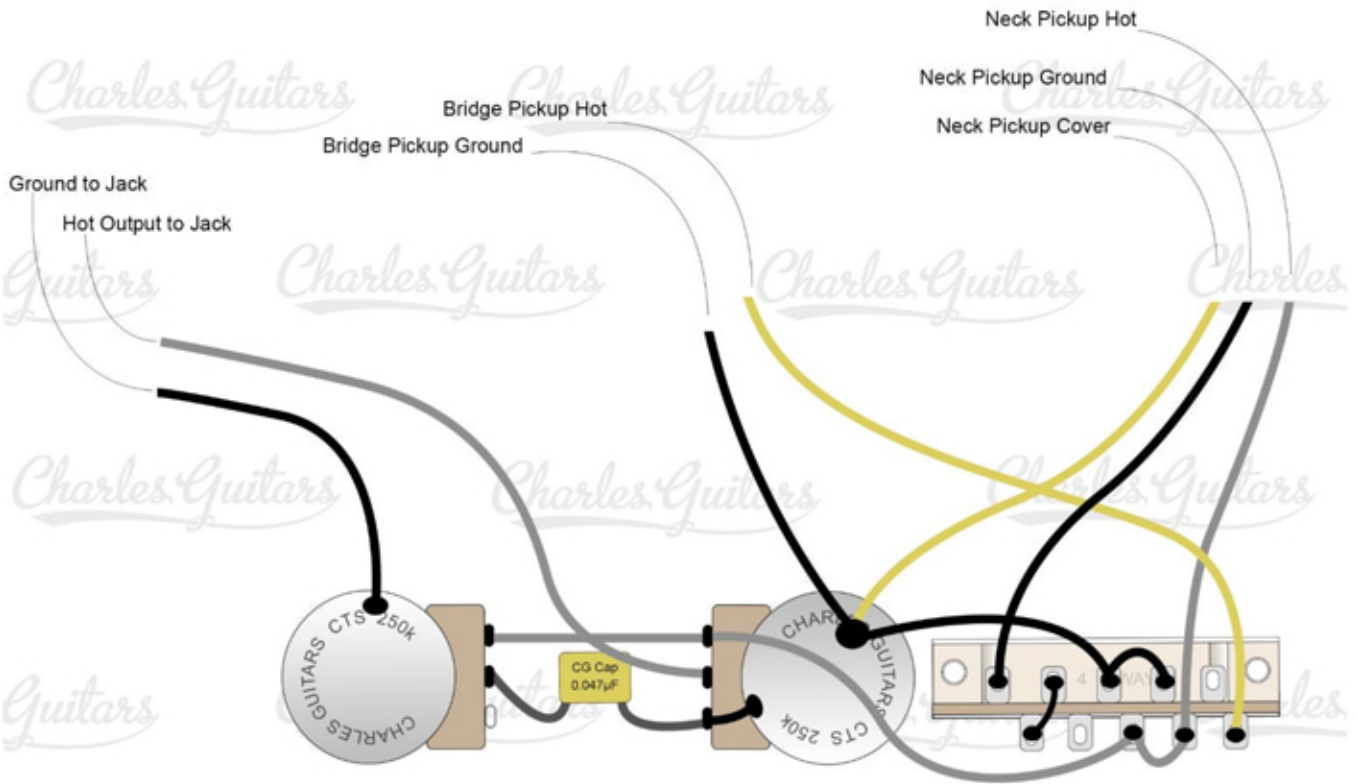

Jack Detail

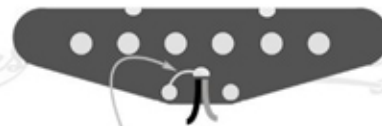

Remove this jumper wire which connect the ground to the pickup cover.

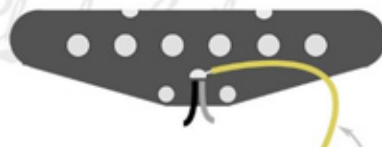

Connect this new wire to ground the pickup cover

The black circles or rectangles denote solder points. The empty rectangles denote where the tab is cut off.